

Agilent MS40+

Mono Stage Rotary Vane Pump
Small Footprint
High Pumping Capacity




Agilent MS40+ Mono Stage Rotary Vane Pump

HIGHEST PERFORMANCES / SIZE RATIO

- Sophisticated Electronics and excellent mechanical design allow high pumping capacity and reduced dimensions
- Base pressure below 5×10^{-2} mbar (3.75×10^{-2} Torr)
- High pumping speed over a wide range, from atmosphere to 1 mbar (0.75 Torr)
- Inverter technology allows to manage pumping speed to more than $45 \text{ m}^3/\text{h}$ (26.5 cfm)
- Best noise level, with the highest throughput

**Best performance
in the smallest package!**

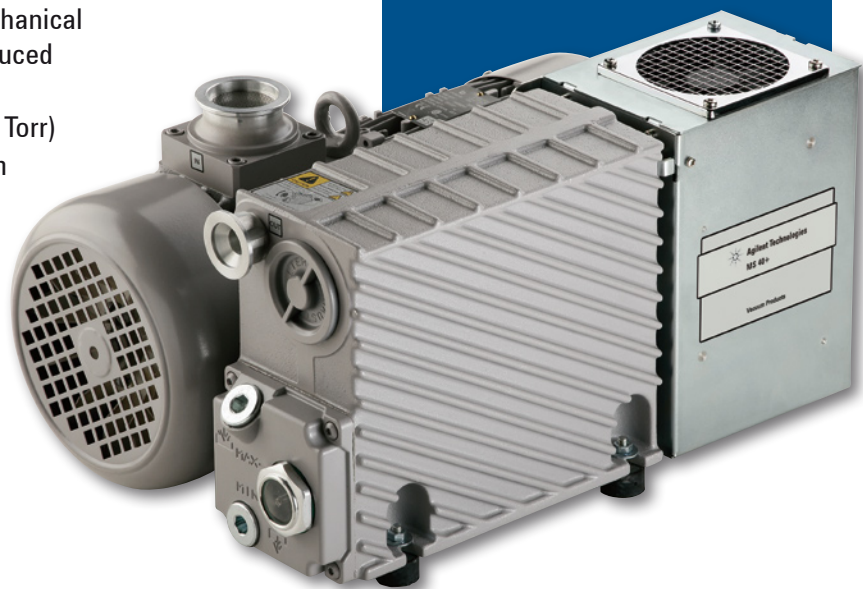

Inverter Technology

- Proven on-board electronics allow constant performance worldwide
- Inverter electronics enable tailoring pumping speed to each application
- Environmentally friendly and cost-effective due to reduced power requirements, low start up current (<10A) and standby mode

Applications

- Suitable for steady and high gas throughput conditions at pressures below 10 Torr, in applications like Mass Spectrometry (including LC-MS, ICP-MS, GC-TOF-MS, etc.), Electron Microscopy, and other Scientific Instrumentation. Please contact Agilent to qualify use in cyclic applications

Smallest Dimensions

- The smallest single stage $40 \text{ m}^3/\text{h}$ pump in the market. $297 \times 418 \times 225 \text{ mm}$ (11.69 x 16.46 x 8.86 inches) including on-board electronics, integrated exhaust filter and oil return kit.
- Easier system integration. Simple maintenance
- Allows smaller overall instrument design, therefore reducing costs

Worldwide Service Capability

- Three levels of Product Support
 - 24h Advance Exchange
 - Factory Repair
 - Upgrade Program
- allow global coverage of service needs to maximize productivity and uptime

Interface Capabilities

- I/O and RS232/RS485 enable adjustment of operating parameters simplifying system integration
- T-Plus software allows control of pump parameters via PC, improving uptime and reliability, and reducing maintenance costs

Features and Benefits



Inverter Technology

- Low start up current (<10A)
- Reduced operating power requirements
- Single phase
- Truly universal voltage and frequency



Integrated Design including:

- Oil return kit
- Anti suck-back valve
- Exhaust filter

Resulting in Compactness, Reduced costs, Easier maintenance, Higher reliability



Interface capabilities

- I/O and RS232 / RS485
- Adjustable speed: 40 - 60 Hz
- Tailored pump performance
- Adjustable acoustical signals
- Standby mode (low speed)


Remote diagnostics

Allow the control of oil level, temperature, power, current


Ordering Information

MS40+	Part Number
MS40+ RVP, 25KF Inlet Flange, with I/O and RS232/485 Interface, without Oil Level Sensor	949-9225
MS40+ RVP, 40KF Inlet Flange, Full Optional with I/O and RS232/485 Interface, with Oil Level Sensor	949-9240
MS40+ RVP, 40KF Inlet Flange, Base Version	949-9241
ACCESSORIES	Part Number
MS40+ Exhaust filter	949-9201
MS40+ 1 Litre Oil Tank	949-9202
MS40+ Maintenance Kit	949-9203
Power cable EU	949-9396
208Vac US Power cable	949-9400
Power cable UK	949-9398
Power cable IEC320	949-9399
T-PLUS Navigator SW (w/serial cable)	969-9883

Pumping Speed Curve (Inlet Port KF25)

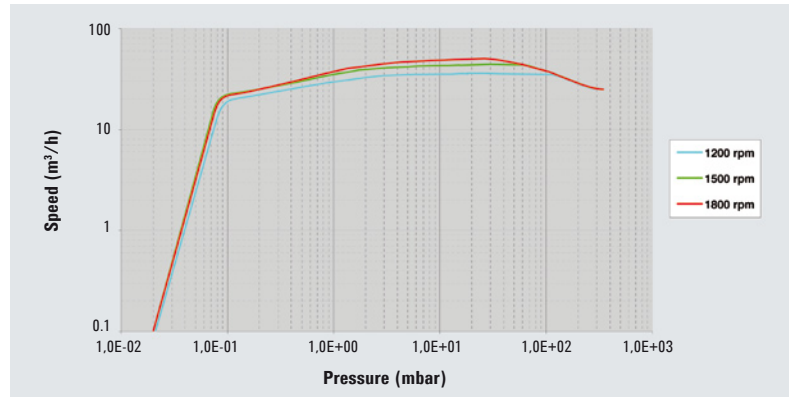

Pumping Speed Curve (Inlet Port KF40)

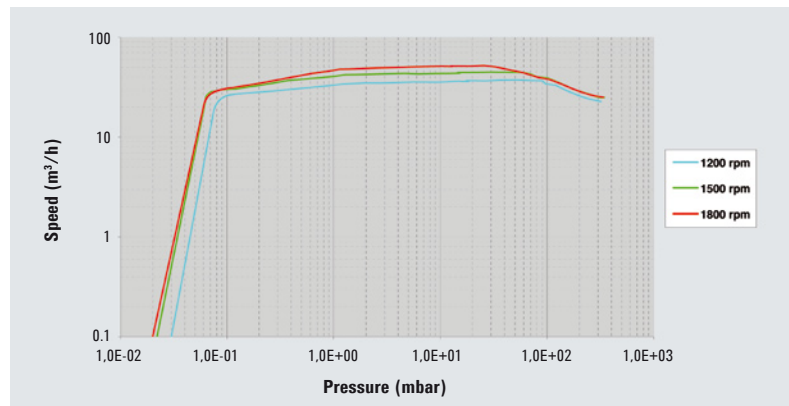

Technical Specifications

Free air displacement	828 l/min (29.2 cfm; 49.7 m³/h)
Pumping Speed (at 5 mbar inlet pressure)	40 m³/h
Ultimate Total Pressure	5x10 ⁻² mbar
Oil Capacity min/max	1 l
Motor Rating 3ph	0.75 kW
Noise Level with gas ballast closed	≤ 62 dB(A)
Oil Temperature	60 °C
Pump operating	140 °F
IP Value	20
Installation category	II
Pollution degree	2
Operating Temperature Range	12 – 40 °C
Nominal rotation speed	1450 rpm
Weight	33 Kg 72.7 lb
Inlet Flange 949-9225	DN 25KF
Inlet Flange 949-9240 / 949-9941	DN 40KF
Exhaust Flange	DN 25KF
Main Dimensions: - length	418 mm
- width	297 mm
- height	228 mm
Nominal Input Voltage	200-240 V
Input frequency	50 / 60 Hz
Max input power	1200 VA
Internal Main Fuse (TT type)	12.5 A

30%
LOWER
motor rating


NOMINAL
Pumping speed
from 1 mbar to
atmosphere

20%
LESS
weight

10%
SMALLER
dimensions

• Comparisons referred to published competitors' specifications

Agilent MS40+ Rotary Vane Pump - Outline drawing

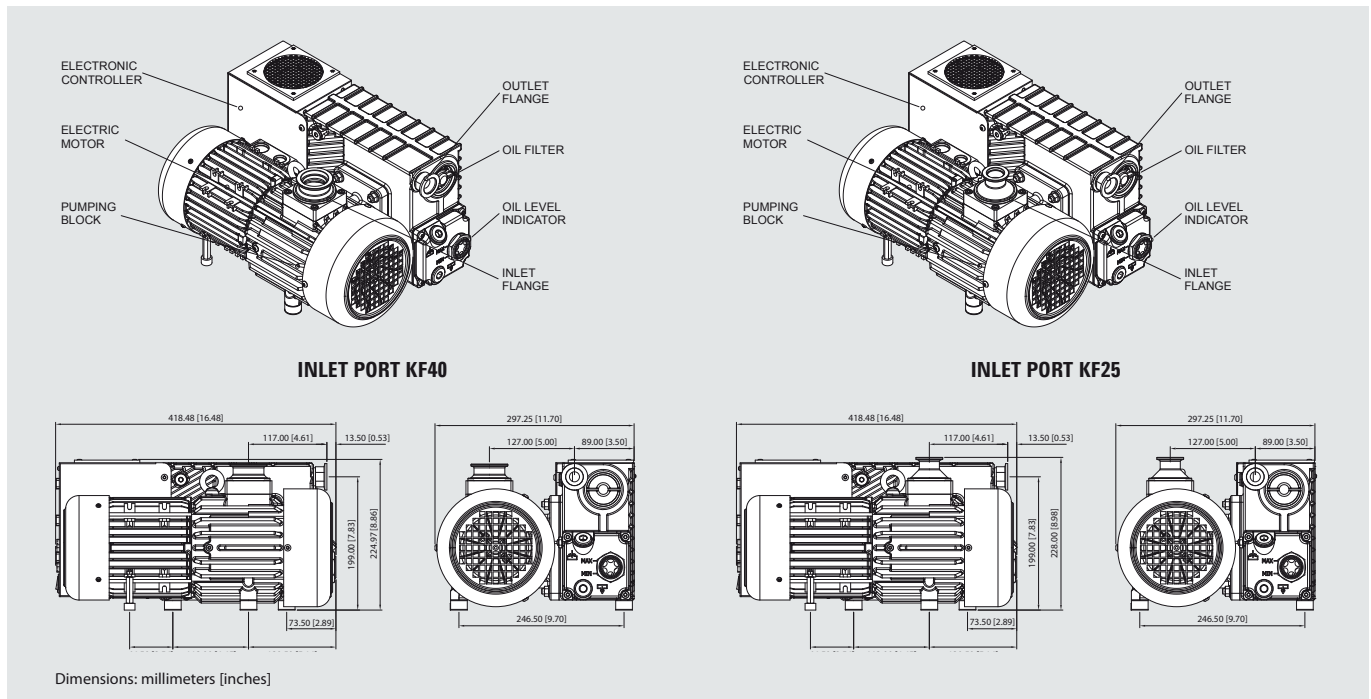

All specifications are subject to change without notice

Agilent Technologies

United States and Canada

Agilent Technologies
121 Hartwell Avenue
Lexington, MA 02421
USA
Tel.: +1 781 861 7200
Toll-Free: +1 800 882 7426
Fax: +1 781 860 5437
vpl-customerservice@agilent.com

Benelux

Agilent Technologies Netherlands B.V.
Herculesweg 8
4338 PL Middelburg
The Netherlands
Tel: +31 118 671570
Fax: +31 118 671569
Toll free: 00 800 234 234 00

China

Agilent Technologies (China) Co. Ltd
No.3, Wang Jing Bei Lu,
Chao Yang District,
Beijing, 100102
China
Tel.: +86 (10) 6439 7888
Fax: +86 (10) 6439 1318
Toll-Free: 800 820 8266
vpc-customerservice@agilent.com

France

Agilent Technologies France
7 avenue des Tropiques
Z.A. de Courtaboeuf - B.P. 12
91941 Les Ulis cedex
France
Tel.: +33 (0) 1 69 86 38 84

Fax: +33 (0) 1 69 86 29 88
Toll free: 00 800 234 234 00
vpf.sales@agilent.com

Germany & Austria

Agilent Technologies
Alsfelder Strasse 6
Postfach 11 14 35
64289 Darmstadt
Germany
Tel.: +49 (0) 6151 703 353
Fax: +49 (0) 6151 703 302
Toll free: 00 800 234 234 00

India

Agilent Technologies India Pvt. Ltd.
G01. Prime corporate Park,
230/231, Sahar Road,
Opp. Blue Dart Centre,
Andheri (East), Mumbai – 400 099.
India
Tel: +91 22 30648287/8200
Fax: +91 22 30648250
Toll Free: 1800 113037
cag_india@agilent.com

Italy

Agilent Technologies Italia S.p.A.
via F.lli Varian 54
10040 Leini, (Torino)
Italy
Tel.: +39 011 997 9111
Fax: +39 011 997 9350
Toll-Free: 00 800 234 234 00
vpt.sales@agilent.com
vpt-customerservice@agilent.com

Japan

Agilent Technologies Japan, Ltd.
8th Floor
Sumitomo Shibaura Building
4-16-36 Shibaura Minato-ku
Tokyo 108-0023
Japan
Tel.: +81 3 5232 1253
Toll-Free: 0120 655 040
Fax: +81 3 5232 1710
vpj-customerservice@agilent.com

Korea

Agilent Technologies Korea Ltd.
Shinsa 2nd Bldg. 2F
966-5 Daechi-dong
Kangnam-gu, Seoul
Korea 135-280
Tel.: +82 2 3452 2455
Toll-Free: 080 222 2452
Fax: +82 2 3452 2451
vpk-customerservice@agilent.com

Mexico

Agilent Technologies
Concepcion Beistegui No 109
Col Del Valle
C.P. 03100
Mexico, D.F.
Tel.: +52 5 523 9465
Fax: +52 5 523 9472

Singapore

Agilent Technologies Singapore Pte Ltd
No.1 Yishun Avenue 7
Singapore 768923

Tel: +65 6215 8045
Fax: +65 6754 0574
Toll-Free: 1 800 2762622
vps-customerservice@agilent.com

South East Asia

Agilent Technologies Sales Sdn Bhd
Unit 201, Level 2 uptown 2,
2 Jalan SS21/37, Damansara Uptown
47400 Petaling Jaya,
Selangor, Malaysia
Tel: +603 7712 6106
Fax: +603 6733 8121
Toll-Free: 1 800 880 805
vps-customerservice@agilent.com

Taiwan

Agilent Technologies Taiwan Limited
20 Kao-Shuang Rd.,
Pin-Chen City, 324
Taoyuan Hsien, Taiwan, R.O.C.
Tel. +886 34959281
Toll Free: 0800 051 342
vpw-customerservice@agilent.com

UK & Ireland

Agilent Technologies UK Ltd
6 Mead Road
Oxford Industrial Park
Yarnton, Oxford OX5 1QU
UK
Tel.: +44 (0) 1865 291570
Fax: +44 (0) 1865 291571
Toll free: 00 800 234 234 00
vpt-customerservice@agilent.com



This information is subject to change without notice

© Agilent Technologies, Inc. 2011
Published May 27, 2011
VPD-0311EN



Agilent Technologies